



## Applications

Light duty suction and transportation of liquids. Designed for industry and agriculture.

### Properties:

Flexible PVC hose, reinforced with a shock resistant rigid PVC spiral Super elastic  
Excellent resistance to weather conditions and most chemicals.  
Smooth bore, exterior sinuous

### Standard Colors:

Transparent-Blue (Available in various colors on request)

### Materials:

DOP Free  
RoHS, Reach Standard  
UV- protections added


### Temperatures Range:

-15°C < Temp < 65°C

### Standard:

Tolerance: ISO 1307

Code	Internal Diameter		Weight gr / m	Work Pressure Bar / 20°C	Bending Radius mm	Vacuum MH <sub>2</sub> O	Roll Length m
	mm	Inch					
WSE-034	19	3/4"	250	7	81	7	50
WSE-078	22	7/8"	260	7	95	7	50
WSE-100	25	1"	270	6.5	100	7	50
WSE-130	30		340	6	114	7	50
WSE-125	32	1 1/4"	345	6	124	7	50
WSE-150	38	1 1/2"	470	6	147	7	50
WSE-140	40		500	5.5	157	7	50
WSE-145	45		550	5.5	185	7	50
WSE-148	48		710	5	195	7	50
WSE-200	51	2"	680	5	195	7	50
WSE-260	60		950	4	238	7	50
WSE-250	63	2 1/2"	980	4	247	7	50
WSE-270	70		1000	4	280	7	50
WSE-300	76	3"	1300	4	304	6	50
WSE-380	80		1200	3	318	6	50
WSE-350	89	3 1/2"	1800	3	371	6	50
WSE-400	102	4"	2000	3	409	6	30
WSE-450	114	4 1/2"	2500	2.5	451	6	30
WSE-500	127	5"	2800	3	599	5	30
WSE-600	152	6"	4050	3	679	5	10/20
WSE-800	203	8"	5500	2	855		10

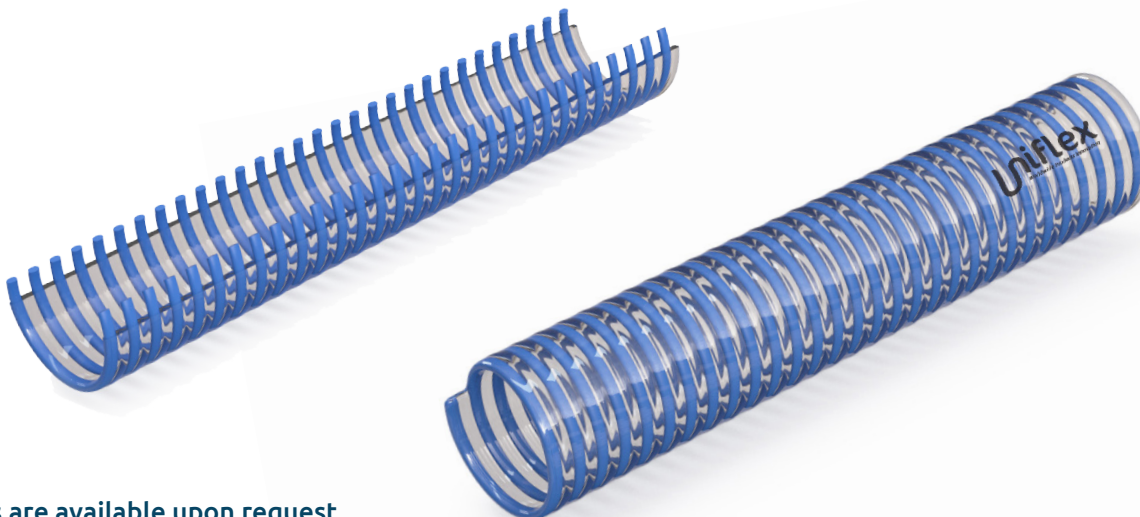

sizes are available upon request.

