



OILS & FUEL Steel Wire Reinforced

Applications:

Transportation of solids and liquids of lubricants oils & fuel.

Properties:

Reinforced with galvanized wire
 Manufactured from unique material with excellent resistance to lubricants, oils & fuel.
 Excellent durability to weather and conditions.
 Bore smooth to minimize friction loss

Standart Colors:

Transparent Yellow

Materials:

unique formulation of thermoplastic, PVC.


Temperatures Range:

-15°C < Temp <65°C

Standard:

Tolerance: ISO 1307
 UL 94

Code	Internal Diameter		Weight gr / m ± 10%	Work Pressure Bar / 20°C	Vacuum MH ² O	Bending Radius mm	Roll Length m
	mm	Inc					
ARF-012	13	½"	200	10	9	50	50
ARF-058	16	5/8"	250	10	9	60	50
ARF-034	19	¾"		300	9	9	70
ARF-078	22	7/8"	420	9	9	80	50
ARF-100	25	1"	500	8.5	9	100	50
ARF-130	30		600	8	9	120	50
ARF-125	32	1 ¼"	600	8	9	130	50
ARF-150	38	1 ½"	800	8	9	150	50
ARF-140	40		840	8	9	160	50
ARF-145	45		1000	8	9	180	50
ARF-148	48		1100	8	9	200	50
ARF-200	50	2"	1150	6	9	200	50
ARF-260	60		1500	5.5	9	240	30
ARF-250	63	2 ½"	1575	5.5	9	250	30
ARF-300	76	3"	2100	4.5	8.5	300	30

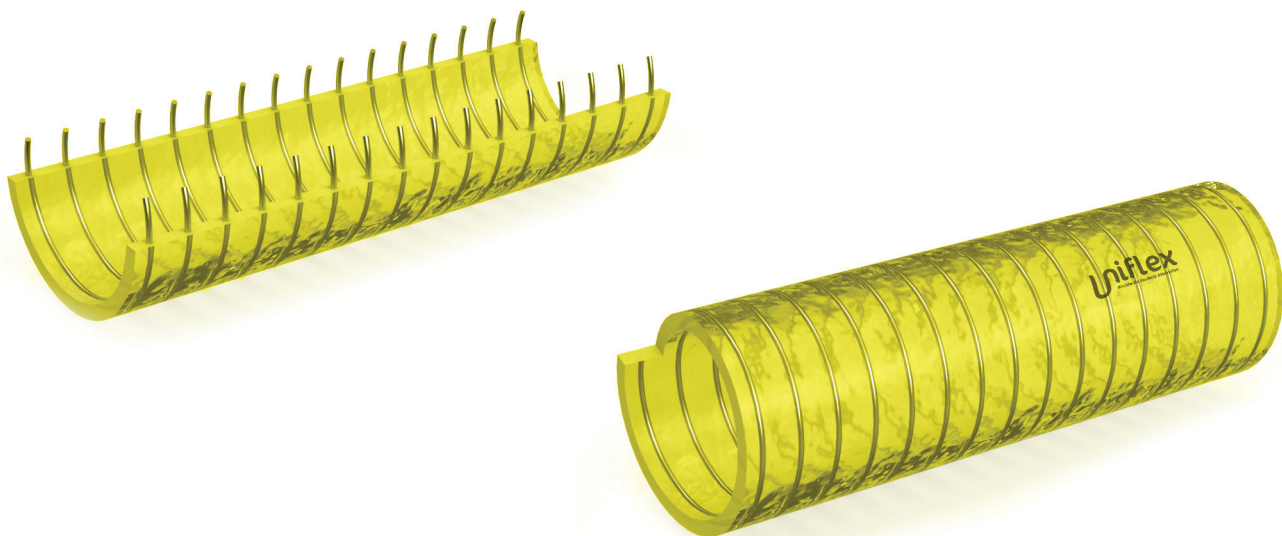

sizes are available upon request.

