



Applications:

Transportation of liquids and lubricants oils & fuel.

Properties:

Flexible PVC tubing
Wide range of metric or imperial sizes
Manufactured from unique material with excellent resistance to lubricants oils & fuel

Standard Color:

Transparent Yellow


Temperatures Range:

-10°C < Temp <60°C

Standards:

Tolerance: ISO 1307
RoHS, Reach Standard
UL94

Code	I.D. mm ± 0.5	O.D. mm ± 0.5	Meter weight ± 10%	Roll Length Meter
10410401-OF	4	6	20	100
10410501-OF	5	8	35	100
10410601-OF	6	9	45	100
10410801-OF	8	11	55	50
10410802-OF	8	12	75	50
10411101-OF	10	12	65	50
10411001-OF	10	13	70	50
10411201-OF	12	15	80	50
10411202-OF	12	16	110	50
10411503-OF	15	18	105	50
10411501-OF	15	19	130	50
10411601-OF	16	20	140	50
10411801-OF	18	23	195	50
10412201-OF	22	27	235	50
10412501-OF	25	31	325	50/25

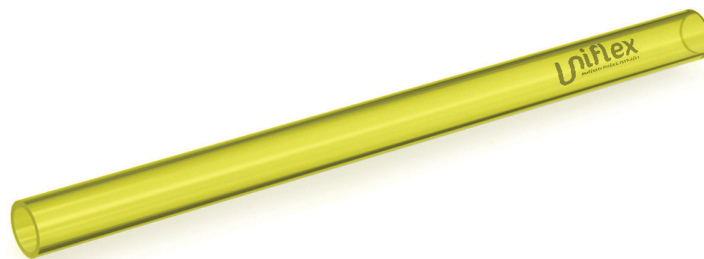

sizes are available upon request.

