


Applications:

Ventilation and suction of smoke and dust. Transport of sawdust.
 Designed for drainage of air-condition systems.

Properties:

Flexible PVC hose, reinforced with a shock resistant rigid PVC spiral
 Excellent durability to weather conditions and most chemicals.
 Internally and externally sinuous

Standart Colors:

Grey (Available in various colors on request)
 W = white

Materials:

DOP Free
 RoHS, Reach Standard,
 UV- protections added


Temperatures Range:

-15°C < Temp < 60°C

Standard:

Tolerance: ISO 1307

Code	Internal Diameter		Weight gr / m	Work Pressure Bar 20°C	Vacuum MH ₂ O	Bending Radius mm	Roll Length m
	mm	Inch					
V-012W	12	½"	80	1	5	13	30
V-058W	16	5/8"	100	1	5	16	50
V-034W	19	¾"	120	1	5	19	50/30
V-078W	22	7/8"	130	1	5	22	30
V-100	25	1"	140	1	5	25	30
V-125	32	1 ¼"	230	1	5	32	30
V-150	38	1 ½"	280	1	4	38	30
V-140	40		290	1	4	40	30
V-142	42		320	1	4	42	30
V-145	45		400	1	4	45	30
V-148	48		420	0.5	4	48	30
V-200	50	2"	430	0.5	4	50	30
V-260	60		510	0.5	4	60	30
V-250	63	2 ½"	590	0.5	4	63	30
V-270	70		610	0	4	70	30
V-300	75	3"	690	0	4	75	30
V-380	80		700	0	4	80	30
V-350	89	3 ½"	830	0	4	89	30
V-400	102	4"	980	0	4	102	30
V-450	114	4 ½"	1100	0	4	114	30
V-500	127	5"	1250	0	4	127	30
V-600	152	6"	1700	0	4	152	30
V-660	160		1900	0	4	160	30
V-670	170		1950	0	4	170	30
V-700	178	7"	2050	0	4	178	20 / 30
V-800	203	8"	2400	0	4	406	20 / 30
V-1000	254	10"	3000	0	4	508	20

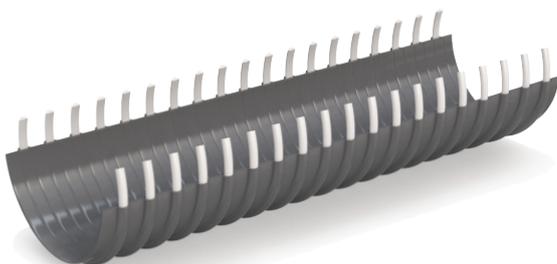

sizes are available upon request.

