

## Applications:

Designed for heavy duty suction and transportation of petrol and oils.

## Properties:

Flexible PVC hose, reinforced with a shock resistant rigid PVC spiral  
High durability to petrol and oils.  
Erosion and crush resistance under heavy duty conditions.  
Excellent resistance to weather conditions and most chemicals.  
Bore smooth to minimize friction loss

## Standard Colors:

Blue

## Materials:

DOP Free  
RoHS, Reach Standard  
UV- protections added


## Temperatures Range:

-15°C < Temp < 60°C

## Standard:

Tolerance: ISO 1307

Code	Internal Diameter		Weight gr / m ± 10%	Work Pressure Bar / 20°C	Vacuum MH <sub>2</sub> O	Bending Radius mm	Roll Length m
	mm	Inch					
F-100	25	1"	500	8	9	175	50
F-125	32	1 ¼"	600	8	9	224	50
F-150	38	1 ½"	800	7	9	266	50
F-200	51	2"	1000	6	9	357	50
F-250	63	2 ½"	1500	6	9	360	50
F-300	76	3"	1800	5	9	532	50

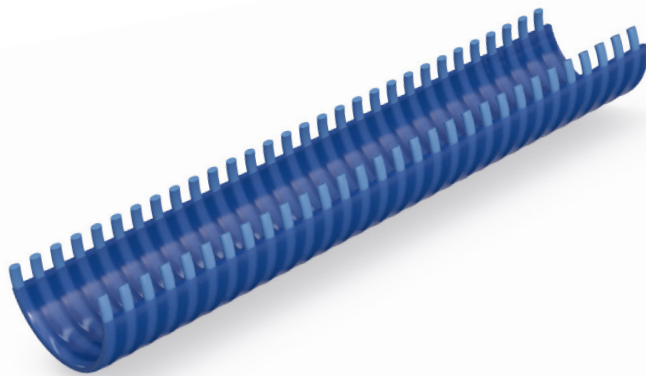

sizes are available upon request.

