

Applications:

Specially designed hose for installation in spa, baths, and whirlpools.

Properties:

Flexible PVC hose, reinforced with a shock resistant rigid PVC spiral.
Erosion and crush resistance under heavy duty conditions.
Excellent resistance to weather conditions and most chemicals.
Bore smooth to minimize friction loss, exterior smooth

Standart Colors:

White

Materials:

DOP Free
RoHS, Reach Standard
UV- protections added


Temperatures Range:

-15°C < Temp <60°C

Standard:

Tolerance: ISO 1307

Code	External Diameter O.D.	Weight	Work Pressure	Bending Radius	Roll Length
	mm	gr / m ± 10%	Bar / 20°C	mm	m
SPA-020	20	220	7	80	25
SPA-032	32	310	6	128	25
SPA-033	33	400	6	132	25
SPA-040	40	480	5	160	25
SPA-048	48	650	5	192	25
SPA-050	50	680	4	200	25

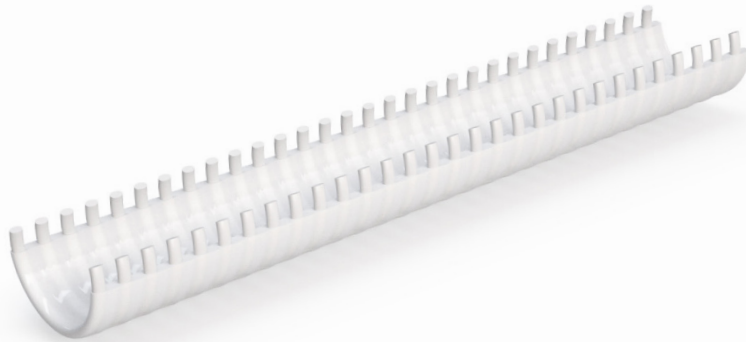

sizes are available upon request.

